



Climbing



Balancing



Socializing
















8612





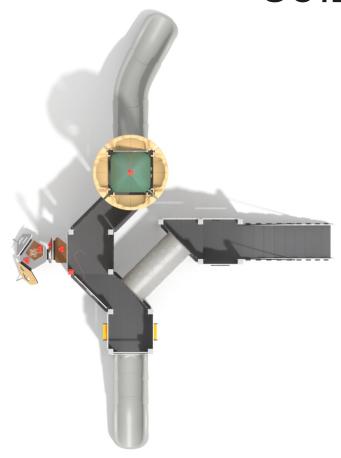

Materials



Wood from coniferous trees (Scandinavian spruce), with a crosssection of 90x90 mm, heartwood-free, layered with polyurethane adhesives completely resistant to moisture. The wood undergoes a three-stage impregnation



stainless steel AISI304 totally resistant to various weather conditions.



Elements made of stainless steel AISI304 totally resistant to various weather conditions.



Anthracite non-slip HPL 18 mm panel with hexagonal structurem characterized by maximum resistance to environmental factors and highest durability against abrasion.



Wall panels made of coloured, highest quality HPL 13 mm (black HPL 8mm), completely resistant moisture and UV. to moisture and UV.



Wall panels made of high quality, coloured triple-layer HDPE 15 mm, resistant to



16 mm diameter polypropylene ropes ppmultislip, with a steel core.



Elements made of LDPE material using rotomoulding



LDPE rotomoulding window shutters with directly printed polycarbonate sheets inside.



Spring made of spring steel, with a diameter of 200 mm and a rod diameter of 20 mm. The spring set is powder galvanized and powder coated with polyester paints that are UV resistant.